


compact

Quick User Guide





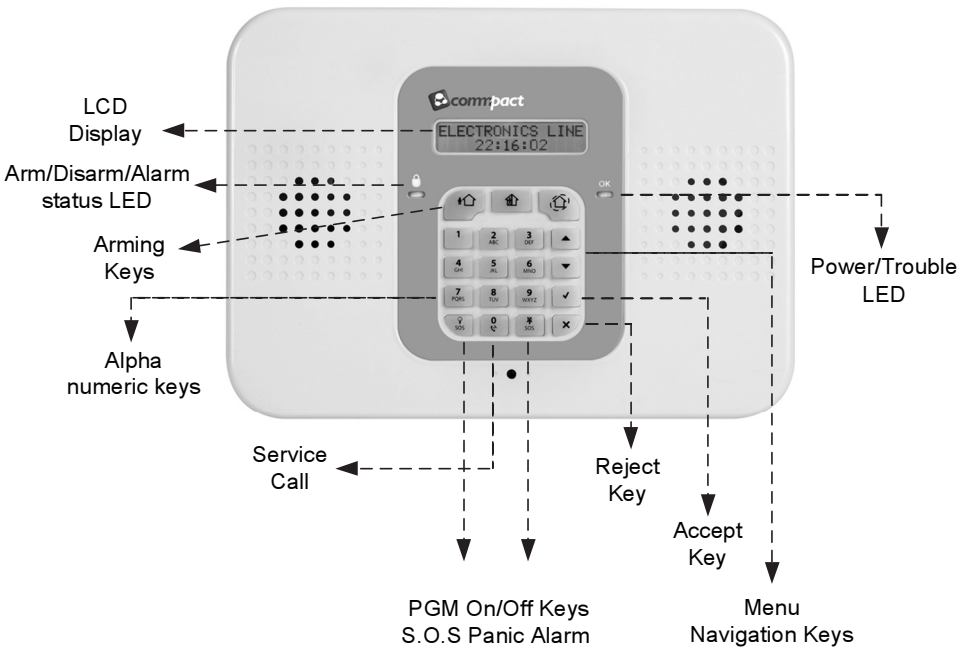














UPGRADING
EVERYDAY
SECURITY



UPGRADING
EVERYDAY
SECURITY

compact

Thank you for choosing **CommPact** wireless intruder control panel. This quick start guide describes the main user operating actions of the **CommPact**. To view the full version of the user manual, please refer our website www.electronics-line.com.

Full Arm	Press 	
Partial Arm	Press 	If required, enter your user code
Perimeter Arm	Press 	
Disarm	Enter your user code	In addition, silences the siren in alarm event
Panic alarm	Press and hold down  + 	
Fire alarm	Press and hold down  + 	
Medical alarm	Press and hold down  + 	
Check system troubles	Press  and scroll the list	Additionally, silences any trouble tones
Global Chime	Press  	
Access Menu Mode	Press  then [User Code]	
Service Call	Press  and then hold 	
Turn On / Off PGM	 /  → 30	



UPGRADING
EVERYDAY
SECURITY

compact

LEDs Indication



LED:

- Off:** System disarmed
- Green :** System armed
- Flashing red :** Alarm

'OK' LED:

- Green:** Power OK
- Yellow:** System trouble
- Flashing green:** Open zone
- Flashing yellow:** (Slow) Low battery, (Fast) AC loss

In case of System Trouble, press



to identify the problem.

Edit/Delete User Code

1. From the main display press
2. Enter master code (Default code 1234)
3. Select [4] User Code and press
4. Select a user and press
5. Select [1] Edit Code.
6. Edit the user code or enter 0000 to delete
7. Press

Bypass / Unbypass a zone

1. From the main display press
2. Enter master code (Default code 1234)
3. On the Main menu, press [21]
4. Select a zone and press to
5. To save the status, press

SMS Control Commands

Controlling the System through SMS

Command Code Numbers:

- 120:** Disarm
- 121:** Full arm
- 122:** Part arm
- 123:** Perimeter arm
- 030:** PGM off
- 130:** PGM on
- 200:** System arm status

Optional Free Text					User Code				Command				
D	I	S	A	R	M	#	1	2	3	4	1	2	0

SMS Structure: [Free text - Up to 43 characters][#][User Code][Command]

compact

Optional Free Text						User Code				Command			
D	I	S	A	R	M	#	1	2	3	4	1	2	0

Example: DISARM#1234120

Telephone Control Commands

1. Dial the number of the premises

- ❖ If your system is connected to a regular phone line dial the number of the panel and wait for three rings then hang up. Wait at least five seconds and dial the number again. On the second ring the control system answers and sounds two tones.
- ❖ If your system supports cellular communication dial and wait until the system answers and two tones are heard.

2. Within 15 seconds, enter the Telecontrol Code (code 29). After a tone sounds, press:

3: Full arm

430: PGM on

6: Disarm

530: PGM off

7: Extend the call

*#: Disconnect the line

9: Cancel siren

2: 2 Way Audio

Keyfob




: Full Arm



: Part Arm, PGM



: Disarm



: Perimeter Arm, PGM

Connecting to your Web Browser Application

1. Enter the Web page address supplied by your Web service provider and press **Go**.
2. Login page:
 - a. **User name and Password** – Enter values supplied by your Web service provider.
 - b. **Passcode** – Enter your **CommPact** user code
3. Click the **Enter** button