

3606

V o i c e M e s s a g e M o d u l e

INTRODUCTION

The 3606 enables the recording of up to six different messages for use with the “Follow-Me” feature on various Electronics Line control panels. Each message is linked to specific alarm or trouble events. When one of these events occurs, the panel calls the “Follow-Me” number and the Voice Module plays back the appropriate message to identify the event to the user.

INSTALLATION

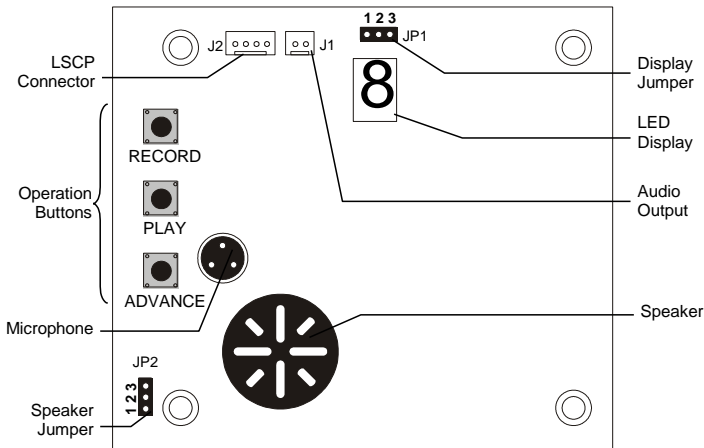


Figure 1: 3606

1. Using the 4-wire cable provided, connect the LSCP connector (J2) to the control panel's LSCP bus.
2. Using the 2-wire cable, connect the Audio Output (J1) to the control panel's microphone input as follows:
Orange: Mic. (Microphone Input) **Black:** GND
3. Install the 3606 module inside the control panel's metal housing using the mounting screws and/or plastic stand-offs provided.

RECORDING MESSAGES

The table on the right lists the six messages and the events to which they are linked.

Each message has a maximum playback time of ten seconds.

To record a message:

1. Disarm the control panel.

Message	Event
1	Zone in Alarm and Zone Tamper
2	Alarm from Fire Zone or “F” Key Alarm
3	“P” Key Alarm or Duress
4	“E” Key Alarm or Alarm from Emergency Zone
5	Low Battery
6	AC Loss

2. Enable the LED display by placing the LED jumper (JP1) over pins 1 & 2.
3. Using the ADVANCE button, select the message you want to record.
4. Press RECORD; the display starts to count down the recording time.
5. Stand about half a meter away from the microphone and state your message clearly.

To playback the recorded message:

1. Enable the Speaker by placing the Speaker jumper (JP2) over pins 1 & 2.
2. Using the ADVANCE button, select the message you want to playback.
3. Press PLAY; the display flashes until the end of the message.

Note: After all the messages have been recorded, it is important to disable the LED and speaker. Place both jumpers over pins 2 & 3 for storage.

OPERATION

When events that are routed to the "Follow-Me" telephone number occur, the control panel notifies the user by sounding a sequence of tones over the telephone. The 3606 can identify the events by playing their messages.

To activate the 3606:

1. When you hear the sequence of tones, press # on the telephone; the appropriate message is played.
2. When you hear another sequence of tones, press #; the panel plays the next message or disconnects if there are no further messages.

SPECIFICATIONS

Number of messages	6
Message run-time	10 seconds max.
LSCP wiring requirements	16 to 22AWG from the control panel
Current consumption	Standby: 6mA Operation: 50mA max. During Recording and Playback: 150mA max.



Electronics Line (E.L.) Ltd.

<http://www.elecline.com>

Head Office and Manufacturing

58 Amal Street, Kiryat Arie
POB 3253
Petah Tikvah 49130 Israel
Tel: (972-3) 921-1110
Fax: (972-3) 922-0831

Electronics Line USA Inc.

1640 Range Street
Boulder Colorado 80301
Tel: (800) 683-6835
Fax: (303) 938-8062

Electronics Line UK

Unit 7, Levis Trading Estate
Station Road, Stechford
Birmingham B339AE
Tel: (44-121) 789-8111
Fax: (44-121) 789-8055

Electronics Line France

ZI-61, rue du Marche Rollay
94500 Champigny-Sur-Marne
Tel: (33-1) 45.16.19.20
Fax: (33-1) 45.16.19.29

All data is subject to change without prior notice.

In no event shall Electronics Line (E.L.) be liable for an amount in excess of E.L.'s original selling price of this product, for any loss or damage whether direct, indirect, incidental, consequential or otherwise arising out of any failure of the product.

ZI0156A (9/99)