

MH-5 Protective Hood

The MH-5 is a protective plastic hood designed for Electronics Line 3000's external detectors in order to provide protection against environmental interferences such as rain and direct sunlight. It is recommended to use the MH-5 for external installations where no other roof protection is available. The MH-5 dimensions are: 165 x 100 x 115 mm.

Wall Mounting

To mount the hood and the detector onto the wall:

1. Choose an appropriate mounting position according to the detector's installation instructions.
2. Knock out the mounting holes of the MH-5 (see Figure 1, positions 1 – 4 for corner mounting and positions 5 – 8 for flat surface mounting), place the hood against the wall in the chosen position and mark the mounting holes. If using the back tamper switch, knock out the back tamper hole also (See Figure 1, position 11).
3. Install the wall anchors in the appropriate positions and attach the MH-5 to the wall.
4. Open the detector's housing and remove the PCB (see the detector's installation instructions).
5. Attach the base of the detector to the MH-5 by driving the supplied screws into the holes shown on Figure 1, positions 9 and 10, and Figure 2, positions 1 and 3).
6. If using the back tamper, drive a screw into the holes shown on Figure 1, position 11 and figure 2, position 2).
7. Replace the detector's PCB and front cover (see the detector's installation instruction).

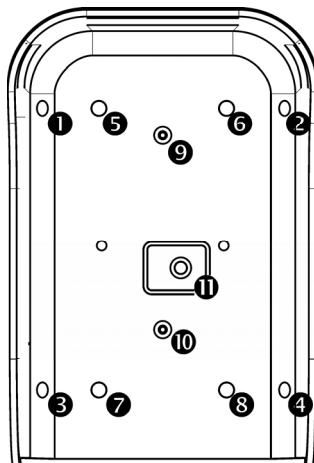


Figure 1: MH-5 Mounting holes

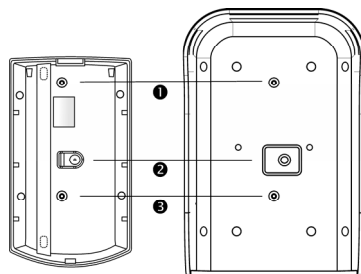


Figure 2 Attaching the detector to the Hood



Electronics Line 3000 Ltd

Electronics Line 3000 Ltd.: 2 Granit Street, Kiryat Arie, POB 3253, Petah Tikvah 49130 Israel. Tel: (972-3) 918-1333, Fax: (972-3) 922-0831

USA: 5637 Arapahoe Avenue, Boulder, Colorado 80303. Tel: (800) 683-6835, Fax: (303) 938-8062

UK: Unit 7, Levis Trading Estate, Station Road, Stechford, Birmingham B33 9AE. Tel: (44-121) 789-8111, Fax: (44-121) 789-8055

SecTecGLOBAL: 156 West 56 Street, Suite 1605, New York, NY 10019, United States, Tel: (1-212) 2652400, Fax: (1-212) 2652419

All data is subject to change without prior notice. In no event shall Electronics Line 3000 Ltd. (EL3K) be liable for an amount in excess of EL3K's original selling price of this product, for any loss or damage whether direct, indirect, incidental, consequential or otherwise arising out of any failure of the product. Hereby, Electronics Line 3000 Ltd. declares that this transmitter is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.



Z10620A (06/08)